

LS7708

Quick Reference Guide



© 2015 Symbol Technologies, Inc.

Zebra reserves the right to make changes to any product to improve reliability, function, or design.

Zebra does not assume any product liability arising out of, or in connection with, the application or use of any product, circuit, or application described herein.

No license is granted, either expressly or by implication, estoppel, or otherwise under any patent right or patent, covering or relating to any combination, system, apparatus, machine, material, method, or process in which Zebra products might be used. An implied license exists only for equipment, circuits, and subsystems contained in Zebra products.

Zebra and the Zebra head graphic are registered trademarks of ZIH Corp. The Symbol logo is a registered trademark of Symbol Technologies, Inc., a Zebra Technologies company.

Zebra Technologies Corporation
Lincolnshire, IL U.S.A.
<http://www.zebra.com>

Warranty

For the complete Zebra hardware product warranty statement, go to:
<http://www.zebra.com/warranty>.

For Australia Only

For Australia Only. This warranty is given by Zebra Technologies Asia Pacific Pte. Ltd., 71 Robinson Road, #05-02/03, Singapore 068895, Singapore. Our goods come with guarantees that cannot be excluded under the Australia Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. Zebra Technologies Corporation Australia's limited warranty above is in addition to any rights and remedies you may have under the Australian Consumer Law. If you have any queries, please call Zebra Technologies Corporation at +65 6858 0722. You may also visit our website: <http://www.zebra.com> for the most updated warranty terms.


Introduction

This Quick Reference Guide is designed to assist during routine LS7708 operation. Detailed information about unpacking, installation, performance specifications, and troubleshooting can be found in the *LS7708 Product Reference Guide*.

Product Description

The LS7708 high performance omni-directional laser scanner reads bar codes quickly and accurately with a minimum of effort. The scanner includes an Electronic Article Surveillance (EAS) antenna, which allows simultaneous bar code reading and security tag deactivation.

The LS7708 can rest on top of a counter or be attached to a mounting surface.

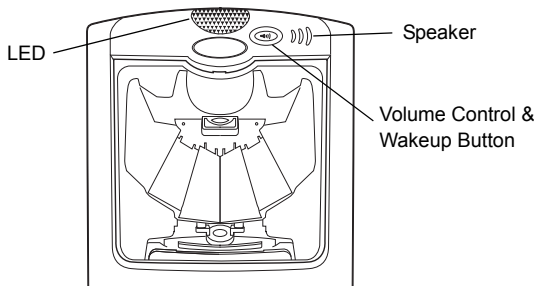

Operating the LS7708 Scanner

Power

The LS7708 does not have an on/off switch. It's ready to scan when connected to a power supply.

Indicator Lights

The scanner employs an LED with a combination of red and green lights to indicate operation and decode status. The Standard LED Definitions Table on page 13 lists the different light combinations and their meanings.

If the scanner is not operating normally, contact the technical person in charge of scanning, or contact Zebra Technologies Support.

Controls


The Volume Control & Wakeup button adjusts the volume of the beeper and wakes the scanner from rest or sleep mode.

When the scanner is operating, depress this button to adjust the volume. Hold down the button until the desired volume is obtained (approximately five seconds). There are three volume levels. The scanner beeps twice at each volume level before cycling to the next.

If the scanner is in a rest or sleep mode, briefly depressing the Volume Control & Wakeup button also awakens the scanner.

Connections

The scanner's ports are at the bottom of the scanner. Turning the scanner upside down allows access to the scanner's ports.

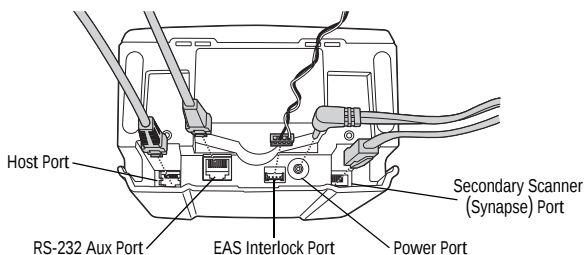


Routing the Cables


The scanner case has several channels to route the outgoing cables so that they are organized and don't hinder the scanner's placement. After placing the cable connectors in the appropriate scanner ports, route the cables through the nearest channel.

For a cable with a Y-connector (containing both power and interface connectors):

1. Connect the power and interface cables to the appropriate ports.
2. Route the cables according to the following diagram.

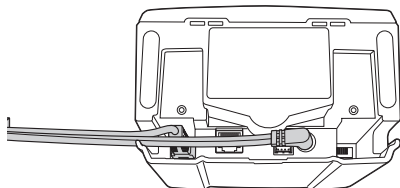

Connections to power and host ports, side exit: keep power cable straight and route it ahead with interface cable.

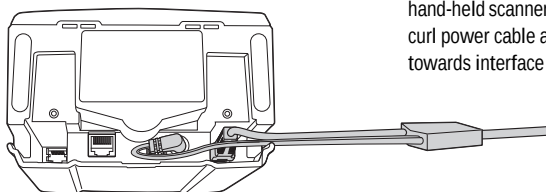


Connections to power and hand-held scanner ports, side exit: curl power cable and route it back towards interface cable.

Mounting the Scanner to a Surface

Caution: The LS7708 requires use of the mounting bracket for proper operation and safety. Failure to use the bracket can result in scanner instability.


The LS7708 is designed to sit on top of a counter or be mounted to a wall. The slot on the back of the scanner accepts a mounting bracket to secure it to the mounting surface. This bracket accommodates either configuration.




Attaching the Mounting Bracket

Freestanding Configuration


Use this method if the scanner will not be secured to a mounting surface.



1. Invert the scanner so that its bottom is facing up and the connections are visible.
2. Connect all interface and power cables to the scanner. Refer to the *LS7708 Product Reference Guide* for detailed information.
3. Orient the mounting bracket so that the plastic tab is facing downward and toward the slot on the back of the scanner. The square cushion on the mounting bracket should be positioned above the power cable.




4. Tilt the plastic tab into the slot on the scanner, and rotate the opposite edge downward. As the bracket rotates, push it toward the slot so that the feet of the bracket lie flat against the scanner's bottom (see arrows).



5. When the bracket is flat against the scanner bottom, release pressure so that the feet slide forward into the front of the scanner.


Mounted Configuration

Use this method if the scanner will be secured to a mounting surface.




1. Determine where the LS7708 is going to be mounted.
2. Use a pencil to mark the four mounting holes. (A mounting template is provided in the *LS7708 Product Reference Guide*.)
3. Remove all rubber feet (from the bracket or from the scanner).
4. Place the mounting bracket in position over the drilled holes with its flat surface facing the mounting surface.

5. Insert four screws through the holes and fasten to the mounting surface.



6. Align the slot at the back of the scanner with the plastic tab on the mounting bracket.
7. Angle the scanner slightly to allow the bracket plastic tab to slide into the slot.



8. Push the scanner towards the plastic tab and rotate it so that it is perpendicular to the mounting surface.
9. Release the pressure on the scanner. The bracket locks into place.

Detaching the Scanner from the Mounting Bracket

To detach the scanner:

1. Grasp the scanner firmly on both sides.
2. Squeeze the back of the scanner slightly while pushing the scanner in the direction of the slot on the back.
3. Rotate the front of the scanner away from the mounting bracket until the bracket pops out of the slot.


Scanning Bar Codes


Install and program the scanner. (Refer to the *LS7708 Product Reference Guide* for programming instructions.) For assistance, contact the local supplier or Zebra Technologies Support.

For the best scanning performance, the counter top or surface area covered by the active scan area should be free of any designs (e.g. stripes or patterns). Ideally, that area should be a light, solid color. A rastering omni-directional scan pattern provides rapid, orientation-free scanning.

To scan a bar code:


1. Ensure all cable connections are secure.
2. Orient the item with the bar code facing the scanner window.
3. Move the item through the active scan area in the direction of the arrows, or place the item in front of the scanner.
4. Upon successful decode, the scanner beeps and the green LED flashes momentarily.

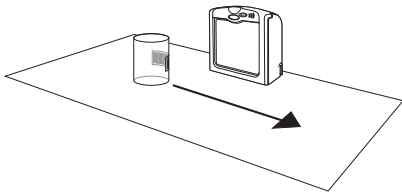



Active Scan Area

The active scan area is the area in front of the scanner window in which a bar code can be decoded. The dotted area represents the active scan area.



Sleep Mode

The scanner automatically enters Sleep mode when it has been inactive for a specified length of time. The scanner has two levels of sleep: laser and motor. In laser sleep mode, after ten seconds of inactivity the laser pulses at a 50% rate, and then drops to 3% after a specified time. In motor sleep mode, the scanner is programmed to turn off the motor and the laser.

The scanner is awakened from either sleep mode by pressing the Volume Control & Wakeup button. In laser sleep mode, the scanner also is awakened by presenting a bar code at the scanner window.

Selecting Beeper Volume

The scanner emits a short beep when it successfully reads a bar code. The volume of the beep is changed by scanning one of the beeper volume bar codes in the *LS7708 Product Reference Guide*, or by using the Volume Control & Wakeup button on the front of the scanner as follows:

1. Press and hold the button for approximately five seconds. The scanner cycles through three settings (low, medium, high), emitting a two-beep tone at each setting.
2. To select a particular setting, release the button after the desired 2-beep tone is heard.

Beeper Definitions

The scanner communicates with the user by emitting different beeper sequences and patterns. See the Standard Beeper Definitions table for beeper sequences that occur during both normal scanning and while programming the scanner.

Beeper Sequence	Indication
Standard Use	
3 short high beeps	Power up.
Short high beep	A bar code symbol was decoded (if decode beeper is enabled).
4 long low beeps	A transmission error was detected in a scanned symbol. The data is ignored. This occurs if the scanner is not properly configured. Check option setting.
5 low beeps	Conversion or format error.
Hi-hi-hi-lo beep	RS-232 receive error on RS-232 host or RS-232 auxiliary port.
Code 39 Buffering	
Hi-lo beep	New Code 39 data was entered into the buffer.
3 long high beeps	Code 39 buffer is full.

Beeper Sequence	Indication
Lo-hi-lo beep	The Code 39 buffer was erased or there was an attempt to clear or transmit an empty buffer.
Lo-hi beep	A successful transmission of buffered data.
Host Specific	
USB only	
4 short high beeps	Scanner has not completed initialization. Wait several seconds and scan again.
Scanner gives a power-up beep after scanning a USB Device Type.	Communication with the bus must be established before the scanner can operate at the highest power level.
This power-up beep occurs more than once.	The USB bus may put the scanner in a state where power to the scanner is cycled on and off more than once. This is normal and usually happens when the PC cold boots.
RS-232 Host only	
1 short high beep	A <BEL> character is received and Beep on <BEL> is enabled.
RS-232 Auxiliary Port only	
1 short high beep	A complete block of data was received and sent to the host, either due to a carriage return or because the two-second serial response timeout has elapsed.
4 long low beeps	A data overrun condition has occurred. Abstain from scanning data from other ports when large amounts of data are sent to the RS-232 Auxiliary port.

LED Definitions

In addition to beeper sequences, the scanner communicates with the user via an LED display. The Standard LED Definitions table defines LED indications that display during scanning.

LED	Indication
Off	No power is applied to the scanner.
Green	The scanner is on and “ready to scan.”
Momentary flash	A bar code was successfully decoded.
Slow continuous red flashing, green on	The scanner is in programming mode.
Fast continuous red flashing, green on	There is an internal problem; the laser is shut off for regulatory reasons.
Green on (and laser blinking)	Scanner is in Low Power Blink mode.
Red and green on	Scanner is in Low Power Motor and Laser Shutdown mode.

Maintenance

Cleaning the exit window is the only maintenance required. A dirty or scratched window may affect scanning activity.

- Remove any dirt particles with a damp cloth.
- Wipe the window with a tissue moistened with ammonia or water.

Troubleshooting

Problem	Possible Causes	Possible Solutions
The omni-line scan pattern does not display when you follow the directions for installing the host cable.	No power to the scanner.	Ensure the host has power, and is on. If the scanner uses a separate power supply, ensure it's connected to a working AC outlet. Power-up sequence is incorrect. Refer to the <i>LS7708 Product Reference Guide</i> for more information.
	Interface cable is not properly connected.	Check for loose cable connections.
Scan line(s) display, but bar code cannot be read.	Scanner is not programmed to read the bar code type.	Ensure scanner is programmed to read the bar code type you are scanning.
	Bar code is damaged.	Try scanning other bar codes of the same bar code type.
	Bar code is too far from scanner.	Move the bar code closer to the scanner.
	The host has disabled scanning or overridden parameter settings.	See the technical person in charge of scanning.
Bar code is decoded, but not transmitted to the host.	Scanner is not programmed for the correct host type.	Scan the appropriate host type bar code.

Problem	Possible Causes	Possible Solutions
Scanned data is incorrectly displayed on the host.	Scanner is not programmed to work with the host. Check scanner host type parameters or editing options.	Ensure proper host is selected. For RS-232, ensure the scanner's communication parameters match the host's settings. For keyboard wedge, ensure scanner is programmed with the correct country code and that the CAPS LOCK key is off. Ensure editing options (e.g., UPCE-to-UPCA Conversion) are properly programmed.
Although the green and red LEDs are on, the scanner does not produce the omni-directional scan pattern.	The scanner has gone into the Low Power "Motor Sleep" Mode.	Press the Volume Control & Wakeup button to awaken the unit.
USB or Synapse host not functioning properly.	Scanner does not recognize host.	Remove and reinsert external power supply to force cable to autodetect correct host.



NOTE If the symbol still does not scan, contact distributor or contact Zebra Technologies Support. See the back cover for contact information.

Programming

Generally, the technical person in charge of scanning customizes the scanner for the particular application using programming bar codes found in the *LS7708 Product Reference Guide*. If the user is programming the scanner, the *LS7708 Product Reference Guide* should be consulted for more information.

Following are some frequently used programming bar codes.

✓ **NOTE** For additional host types, refer to the *LS7708 Product Reference Guide*, p/n 72-69531-xx, available at: <http://www.zebra.com/support>.

When scanning the desired bar code, cover other bar code on page.

Test


To confirm that your scanner is working properly, scan the UPC-A bar code below.



Verify the Scanner Is Working

Set Defaults

Scanning this bar code sets all parameters to their factory default values.



Set Defaults


Host Type Selection

If a Synapse cable (i.e., part number STlxx-xxxx) is used, the scanner autodetects the type of host, so there is no need to scan host type selection bar codes.

If a USB interface is used, the scanner autodetects the USB and defaults to the HID keyboard interface. See page 28 to select the IBM Hand-Held host type. Refer to the *LS7708 Product Reference Guide*, p/n 72-69531-01, for additional USB host types.

If a Keyboard Wedge, RS-232, Wand Emulation, or IBM 46XX host is used, select that host type from the programming bar codes that follow. If Keyboard Wedge is selected, also select a country keyboard type from the following pages.


Keyboard Wedge Host Type




IBM PC/AT & IBM PC Compatibles

Country Keyboard Types (Country Codes)

Country keyboard options apply to the Keyboard Wedge interface only.




North American





French





NOTE When scanning the desired bar code, cover other bar code on page.

Country Keyboard Types (continued)**French Canadian Win95/98****French Canadian XP/2000**



NOTE When scanning the desired bar code, cover other bar code on page.

Country Keyboard Types (continued)**German****Spanish**


NOTE When scanning the desired bar code, cover other bar code on page.

Country Keyboard Types (continued)**Italian****Swedish**



NOTE When scanning the desired bar code, cover other bar code on page.

Country Keyboard Types (continued)**UK English****Japanese**



NOTE When scanning the desired bar code, cover other bar code on page.

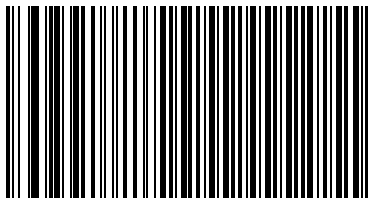Country Keyboard Types (continued)**Brazil Portuguese Windows****RS-232 Host Types****Standard RS-232**



NOTE When scanning the desired bar code, cover other bar code on page.

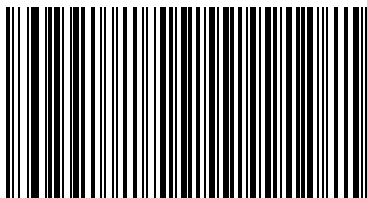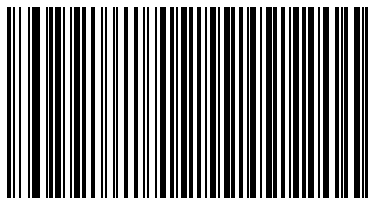RS-232 Host Types (continued)**ICL RS-232****Nixdorf RS-232 Mode A**

NOTE When scanning the desired bar code, cover other bar code on page.

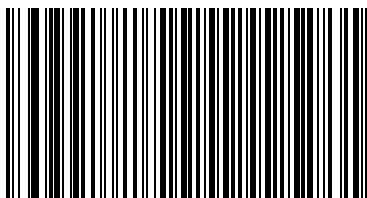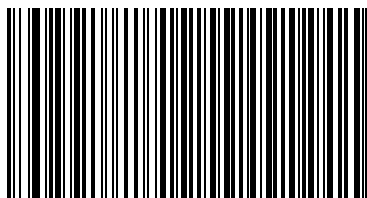RS-232 Host Types (continued)**Nixdorf RS-232 Mode B****Fujitsu RS-232**

NOTE When scanning the desired bar code, cover other bar code on page.

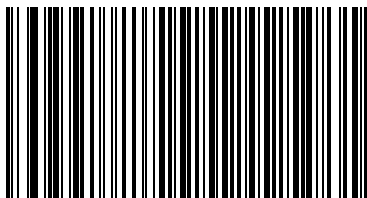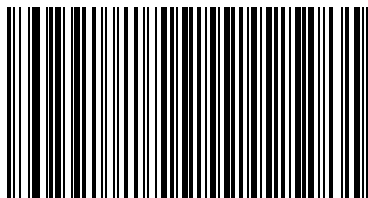RS-232 Host Types (continued)**OPOS****JPOS**

NOTE When scanning the desired bar code, cover other bar code on page.

USB Host Types



HID Keyboard Emulation
(Common Keyboard Wedge Interfacing)



IBM Hand-Held USB
(For IBM SurePOS 700 Series)




NOTE When scanning the desired bar code, cover other bar code on page.

IBM 46XX Host Types**Port 5B****Port 9B**

NOTE When scanning the desired bar code, cover other bar code on page.

IBM 46XX Host Types (continued)



Port 17

Regulatory Information

This guide applies to Model Number: LS7708.

All Zebra devices are designed to be compliant with rules and regulations in locations they are sold and will be labeled as required.

Any changes or modifications to Zebra equipment, not expressly approved by Zebra, could void the user's authority to operate the equipment.

Ergonomic Recommendations



Caution: In order to avoid or minimize the potential risk of ergonomic injury follow the recommendations below. Consult with your local Health & Safety Manager to ensure that you are adhering to your company's safety programs to prevent employee injury.

- Reduce or eliminate repetitive motion
- Maintain a natural position
- Reduce or eliminate excessive force
- Keep objects that are used frequently within easy reach
- Perform tasks at correct heights
- Reduce or eliminate vibration
- Reduce or eliminate direct pressure
- Provide adjustable workstations
- Provide adequate clearance
- Provide a suitable working environment
- Improve work procedures.

Laser Devices



COMPLIES WITH 21CFR1040.10 AND 1040.11 EXCEPT FOR DEVIATIONS PURSUANT TO LASER NOTICE NO. 50, DATED JUNE 24, 2007 AND IEC 60825-1 (Ed. 2.0), EN60825-1:2007.

The laser classification is marked on one of the labels on the device.


Class 1 Laser devices are not considered to be hazardous when used for their intended purpose. The following statement is required to comply with US and international regulations:



CAUTION Use of controls, adjustments or performance of procedures other than those specified herein may result in hazardous laser light exposure.

Class 2 laser scanners use a low power, visible light diode. As with any very bright light source, such as the sun, the user should avoid staring directly into the light beam. Momentary exposure to a Class 2 laser is not known to be harmful.

Scanner Labeling



CLASS 1 LASER PRODUCT
LASER KLASSE 1
APPAREIL À LASER DE CLASSE 1

US CLASS IIa LASER PRODUCT
AVOID LONG TERM VIEWING OF
DIRECT LASER LIGHT

CAUTION - CLASS 2 LASER LIGHT
WHEN OPEN DO NOT STARE INTO
THE BEAM - VORSICHT-LASERLICHT
KLASSE 2. WENN ABDECKUNG
GEÖFFNET NICHT IN DEN STRAHL
BLICKEN - ATTENTION - LUMIÈRE
LASER DE CLASS 2. NE PAS
REGARDER DANS LE FAISCEAU

Laser Labels



In accordance with IEC60825-1 and EN60825, the following information is provided to the user:

ENGLISH

CLASS 1 CLASS 1 LASER PRODUCT
CLASS 2 LASER LIGHT
DO NOT STARE INTO BEAM
CLASS 2 LASER PRODUCT

DANISH / DANSK

KLASSE 1 KLASSE 1 LASERPRODUKT
KLASSE 2 LASERLYF
KLASSE 2 LASERPRODUKT

DUTCH / NEDERLANDS

KLASSE 1 KLASSE-1 LASERPRODUKT
KLASSE 2 LASERLICHT
NIET IN STRAAL STAREN
LASERPRODUKT,
KLASSE-2 LASERPRODUKT

FINNISH / SUOMI

LUOKKA 1 LUOKKA 1 LASERTUOTE
LUOKKA 2 LASERVALO
ÄLÄ TUIJOTA SÄDETTÄ
LUOKKA 2 LASERTUOTE

FRENCH / FRANÇAIS

CLASSE 1 PRODUIT LASER DE CLASSE 1
CLASSE 2 LUMIERE LASER
NE PAS REGARDER LE RAYON FIXEMENT
PRODUIT LASER DE CLASSE 2

GERMAN / DEUTSCH

KLASSE 1 LASERPRODUKT DER KLASSE 1
KLASSE 2 LASERSTRAHLEN
NICHT DIREKT IN DEN LASERSTRAHL SCHAUEN
LASERPRODUKT DER KLASSE 2

JAPANESE / 日本語

クラス1 クラス1 レーザ製品
クラス2 レーザ光線
光線を直視しないでください
クラス2 レーザ製品

CHINESE / 简体中文

1 类 1 类激光产品
2 类 激光
切勿直视光束
2 类激光产品

HEBREW

מוצר לייזר רמה 1 רמה 1

אור לייזר רמה 2
אין להביט אל תוך הזרם
מוצר לייזר רמה 2

ITALIAN / ITALIANO

CLASSE 1 PRODOTTO AL LASER DI CLASSE 1
CLASSE 2 LUCE LASER
SE IKKE IND I STRÅLEN

NON FISSARE IL
RAGGIO/PRODOTTO
AL LASER DI CLASSE 2

NORWEGIAN / NORSK

KLASSE 1 LASERPRODUKT, KLASSE 1
KLASSE 2 LASERLYS IKKE STIRR INN I LYSSTRÅLEN
LASERPRODUKT, KLASSE 2

PORTUGUESE / PORTUGUÊS

CLASSE 1 PRODUTO LASER DA CLASSE 1
CLASSE 2 LUZ DE LASER NÃO FIXAR O RAIOS LUMINOSOS
PRODUTO LASER DA CLASSE 2

SPANISH / ESPAÑOL

CLASE 1 PRODUCTO LASER DE LA CLASE 1
CLASE 2 LUZ LASER
NO MIRE FJAJAMENTE EL HAZ
PRODUIT LASER DE CLASSE 2

SWEDISH / SVENSKA

KLASS 1 LASERPRODUKT KLASS 1
KLASS 2 LASERLJUS STIRRA INTE MOT STRÅLEN
LASERPRODUKT KLASS 2

KOREAN / 한국어

1등급 1등급 레이저 제품
2등급 레이저 광선
이 광선을 주시하지 마십시오.
2등급 레이저 제품

Power Supply

Note: Use ONLY a LISTED, Type no. 50-14000 (5Vdc / 2A), or PWRS-14000 (5Vdc / 2A), Direct Plug-In Power supply, marked Class 2 or LPS (IEC60950-1, SELV). Use of Alternative Power Supply will invalidate any approvals given to this unit and may be dangerous.

Radio Frequency Interference Requirements-FCC



Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a

residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Radio Frequency Interference Requirements - Canada

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

Marking and European Economic Area (EEA)

Statement of Compliance



Zebra hereby declares that this device is in compliance with all the applicable Directives, 2004/108/EC, 2006/95/EC and 2011/65/EU. A Declaration of Conformity may be obtained from <http://www.zebra.com/doc>.

Other Countries

Ukraine

Дане обладнання відповідає вимогам технічного регламенту №1057, № 2008 на обмеження щодо використання деяких небезпечних речовин в електричних та електронних пристроях.



Waste Electrical and Electronic Equipment (WEEE)

English: For EU Customers: All products at the end of their life must be returned to Zebra for recycling. For information on how to return product, please go to: <http://www.zebra.com/weee>.

Bulgarian: За клиенти от ЕС: След края на полезния им живот всички продукти трябва да се връщат на Zebra за рециклиране. За информация относно връщането на продукти, моля отидете на адрес: <http://www.zebra.com/weee>.

Čeština: Pro zákazníky z EU: Všechny produkty je nutné po skončení jejich životnosti vrátit společnosti Zebra k recyklaci. Informace o způsobu vrácení produktu najdete na webové stránce: <http://www.zebra.com/weee>.

Dansk: Til kunder i EU: Alle produkter skal returneres til Zebra til recirkulering, når de er udtjent. Læs oplysningerne om returnering af produkter på: <http://www.zebra.com/weee>.

Deutsch: Für Kunden innerhalb der EU: Alle Produkte müssen am Ende ihrer Lebensdauer zum Recycling an Zebra zurückgesandt werden. Informationen zur Rücksendung von Produkten finden Sie unter <http://www.zebra.com/weee>.

Ελληνικά: Για πελάτες στην Ε.Ε.: Όλα τα προϊόντα, στο τέλος της διάρκειας ζωής τους, πρέπει να επιστρέφονται στην Zebra για ανακύκλωση. Για περισσότερες πληροφορίες σχετικά με την επιστροφή ενός προϊόντος, επισκεφθείτε τη διεύθυνση <http://www.zebra.com/weee> στο Διαδίκτυο.

Eesti: EL klientidele: kõik tooted tuleb nende eluea lõppedes tagastada taaskasutamise eesmärgil Zebra'ile. Lisainformatsiooni saamiseks toote tagastamise kohta külastage palun aadressi: <http://www.zebra.com/weee>.

Español: Para clientes en la Unión Europea: todos los productos deberán entregarse a Zebra al final de su ciclo de vida para que sean reciclados. Si desea más información sobre cómo devolver un producto, visite: <http://www.zebra.com/weee>.

Français : Clients de l'Union Européenne : Tous les produits en fin de cycle de vie doivent être retournés à Zebra pour recyclage. Pour de plus amples informations sur le retour de produits, consultez : <http://www.zebra.com/weee>.

Italiano: per i clienti dell'UE: tutti i prodotti che sono giunti al termine del rispettivo ciclo di vita devono essere restituiti a Zebra al fine di consentirne il riciclaggio. Per informazioni sulle modalità di restituzione, visitare il seguente sito Web: <http://www.zebra.com/weee>.

Latviešu: ES klientiem: visi produkti pēc to kalpošanas mūža beigām ir jānogādā atpakaļ Zebra otrreizējai pārstrādei. Lai iegūtu informāciju par produktu nogādāšanu Zebra, lūdzu, skatiet: <http://www.zebra.com/weee>.

Lietuvių: ES vartotojams: visi gaminiai, pasibaigus jų eksploatacijos laikui, turi būti grąžinti utilizuoti į kompaniją „Zebra“. Daugiau informacijos, kaip grąžinti gaminį, rasite: <http://www.zebra.com/weee>.

Magyar: Az EU-ban vásárlóknak: Minden tönkrement termékét a Zebra vállalatához kell eljuttatni újrahasznosítás céljából. A termék visszajuttatásának módjával kapcsolatos tudnivalókért látogasson el a <http://www.zebra.com/weee> weboldalra.

Malti: Għal klijenti fl-UE: il-prodotti kollha li jkun u waslu fl-aħħar tal-ħajja ta' l-użu tagħhom, iridu jiġu rritornati għand Zebra għar-riċiklaġġ. Għal aktar tagħrif dwar kif għandek tirritorna l-prodott, jekk jogħġbok żur: <http://www.zebra.com/weee>.

Nederlands: Voor klanten in de EU: alle producten dienen aan het einde van hun levensduur naar Zebra te worden teruggezonden voor recycling. Raadpleeg <http://www.zebra.com/weee> voor meer informatie over het terugzenden van producten.

Polski: Klienci z obszaru Unii Europejskiej: Produkty wycofane z eksploatacji należy zwrócić do firmy Zebra w celu ich utylizacji. Informacje na temat zwrotu produktów znajdują się na stronie internetowej <http://www.zebra.com/weee>.

Português: Para clientes da UE: todos os produtos no fim de vida devem ser devolvidos à Zebra para reciclagem. Para obter informações sobre como devolver o produto, visite: <http://www.zebra.com/weee>.

Românesc: Pentru clienții din UE: Toate produsele, la sfârșitul duratei lor de funcționare, trebuie returnate la Zebra pentru reciclare. Pentru informații despre returnarea produsului, accesați: <http://www.zebra.com/weee>.

Slovenčina: Pre zákazníkov z krajín EU: Všetky výrobky musia byť po uplynutí doby ich životnosti vrátené spoločnosti Zebra na recykláciu. Bližšie informácie o vrátení výrobkov nájdete na: <http://www.zebra.com/weee>.

Slovenski: Za kupce v EU: vsi izdelki se morajo po poteku življenjske dobe vrniti podjetju Zebra za reciklažo. Za informacije o vračilu izdelka obiščite: <http://www.zebra.com/weee>.

Suomi: Asiakkaita Euroopan unionin alueella: Kaikki tuotteet on palautettava kierrätettäväksi Zebra-yhtiöön, kun tuotetta ei enää käytetä. Lisätietoja tuotteen palauttamisesta on osoitteessa <http://www.zebra.com/weee>.

Svenska: För kunder inom EU: Alla produkter som uppnått sin livslängd måste returneras till Zebra för återvinning. Information om hur du returnerar produkten finns på <http://www.zebra.com/weee>.

Türkçe: AB Müşterileri için: Kullanım süresi dolan tüm ürünler geri dönüşürme için Zebra'ya iade edilmelidir. Ürünlerin nasıl iade edileceği hakkında bilgi için lütfen şu adresi ziyaret edin: <http://www.zebra.com/weee>.

Service Information

If you have a problem using the equipment, contact your facility's Technical or Systems Support. If there is a problem with the equipment, they will contact Zebra Support at: <http://www.zebra.com/support>.

For the latest version of this guide go to:
<http://www.zebra.com/support>.



Zebra Technologies Corporation
Lincolnshire, IL U.S.A.
<http://www.zebra.com>

Zebra and the Zebra head graphic are registered trademarks of ZIH Corp. The Symbol logo is a registered trademark of Symbol Technologies, Inc., a Zebra Technologies company.

© 2015 Symbol Technologies, Inc.



72-69530-07 Revision A - April 2015

